

# Altea ZIP

Wired

RS485

Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

The first wired motor dedicated to Zip screen applications in confined space.



## Applications



### external vertical screens

- Suitable for tubes diameter 50 mm or more
- Can be used for windows up to 15 m<sup>2</sup>

## Main characteristics

- > High speed motor (for 6 & 10 Nm)
- > Round head for a perfect integration inside the box of a wind zip product
- > Settings from outside of the box especially useful for the upper position (because of the zip)


## Certifications



somfy®

### CHARACTERISTICS

Supply voltage	230 V AC / 50 Hz
Degree of protection	IP 44
Operating temperature	20% -25 to 70°C 80% -10 to 40°C
Protection class	Class I
Limit switch unit	Electronic
Conformity	www.somfy.com/ce

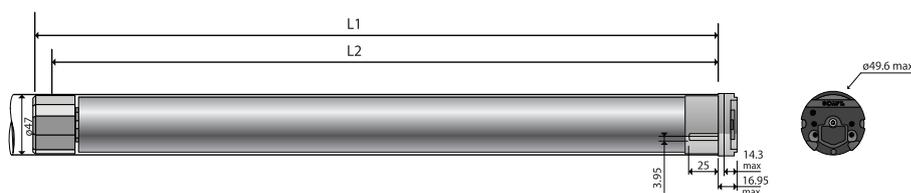

### Performance

Nominal voltage	230 V / 50 Hz		
Torque	6 Nm	15 Nm	25 Nm
Speed	32 rpm	32 rpm	17 rpm

### Dimensions

L1 (in mm)	655	675	655
L2 (in mm)	640	660	640

### Type of cable

230 V / 50 Hz  
4 threads by wire

