

# Altus 40 RTS 447 MHz

Wired

RS485

Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

The diameter 40 mm RTS motor for interior blinds.



## Applications




roller blinds



roman blinds



venetian blinds



cellular blinds



projection screens

- Suitable for tubes diameter 37 mm or more (internal diameter)

## Main characteristics

- > Fits small diameter tubes for compact cases
- > Easy integration thanks to the thin round head
- > RTS embedded with Modulis and solar protection functions compatibility
- > Integrated antenna
- > Remote limit settings
- > Visual feedback of the product to confirm any step of setting and programming
- > Same range of accessories as LS40
- > For interior blinds


## Certifications



somfy®

### CHARACTERISTICS

Supply voltage	220 V AC / 60 Hz
Degree of protection	IP 31
Operating temperature	0 to 60°C
Protection class	Class II
Limit switch unit	Electronic
Conformity	<a href="http://www.somfy.com/ce">www.somfy.com/ce</a>

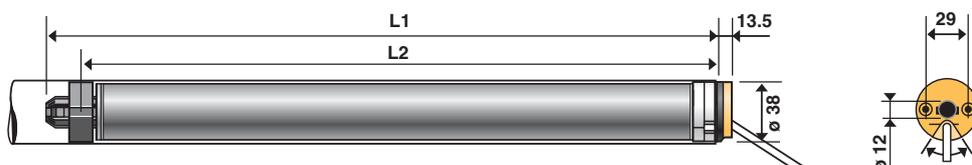

### Performance

Nominal voltage	220 V / 60 Hz	
Torque	3 Nm	9 Nm
Speed	30 rpm	16 rpm
Radio frequency available for RTS	447,7 MHz	

### Dimensions

L1 (in mm)	497	497
L2 (in mm)	473	473

### Type of cable

220 V / 60 Hz  
2 threads by wire

