

# LT28

Wired

RS485

Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

The entry-level DC solution to motorize small sized roller blinds.



## Applications



roller  
blinds

- Suitable for tubes diameter 28 mm or more

## Main characteristics

- > Adjustable up and down limits with rapid end-limits settings (by push buttons)
- > Supplied with a crown and a wheel for tube adaptation
- > DC motor: no electrician is needed for the installation
- > Motor available either with PIN or with ears
- > Easy settings thanks to the manual buttons on the motor head


## Certifications



somfy®

CHARACTERISTICS

Supply voltage	24V DC
Degree of protection	IP 31
Operating temperature	-10 to 60°C
Protection class	Class III
Limit switch unit	Rapid
Conformity	<a href="http://www.somfy.com/ce">www.somfy.com/ce</a>

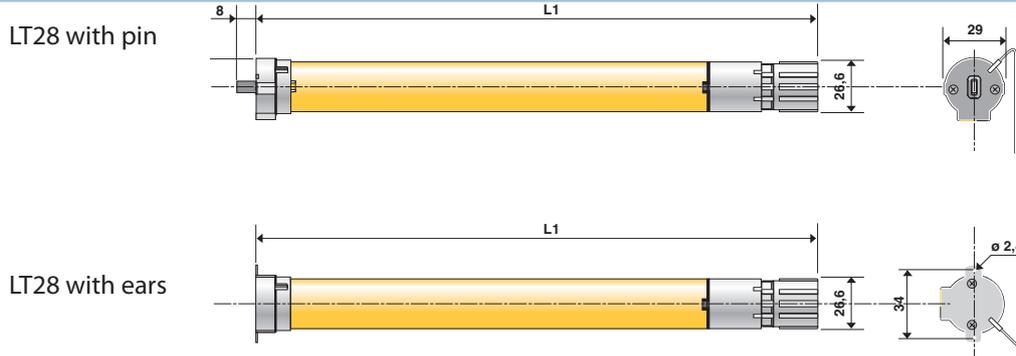

Performance

Nominal voltage	12 V DC	24 V DC
Torque	0,7 Nm	0,7 Nm
Speed	31 rpm	31 rpm

Dimensions

L1 (in mm)	285	285
------------	-----	-----

Type of cable

2 threads by wire

