

animeo IB

Solo 1 zone/2 zones

Ref. 1860143/1860144



OVERVIEW

animeo Solo is a central control unit for motorised sun protection products and windows that can be used to control applications on one or two building façades ("Solo 1 zone" or "Solo 2 zone"). Designed for small to medium sized buildings, the settings can be made directly by the installer without additional software via the menu-driven LCD display.

INSTALLATION FEATURES

- > Easy installation due to uniform spring terminals.
- > Controls all standard Somfy IB, CD and IB+ motor controllers.
- > One assigned switch input for each zone.
- > Sensors can be connected directly to the device (no need for additional sensor boxes).

WHAT'S IN THE BOX

- > animeo Solo 1 zone/2 zones
- > Installation guide

FUNCTIONAL FEATURES

- > Pre-installed basic configuration.
- > Control of the zones directly on the device.
- > Individual settings per zone.
- > Sun, wind, rain, frost and time switching functions, heat retention and heating through the sun
- > Direct operation on the device or via external switch/key switch.


OPTIONAL ACCESSORIES

- > Soliris Sun Sensor (ref. 9154217)
- > Inside Temperature Sensor (ref. 9008044)
- > Outside Temperature Sensor (ref. 9001611)

CHARACTERISTICS

animeo Solo 1 zone/2 zones	Ref. 1860143/1860144
Supply voltage	230 V AC / 50 Hz
Stand-by current (IEC 62301)	< 0.02 A@230 V AC
Stand-by power (IEC 62301)	< 1.5 W@230 V AC
Terminals	Pluggable spring connectors
Supply voltage of sensors IN	SELV, 16 V DC =
Supply voltage of zone switch IN	SELV, 16 V DC =
Supply voltage of error OUT	Dry contact, NO, 24 V/1 A max.
Zone relay as motor/RK/IB	230 V, 3.0 A, $\cos \phi = 0.95$
Operating temperature	0 to 45 °C
Relative humidity	Max. 85 %
Housing material	Glass, metal and PC-ABS
Housing dimensions (h x w x d)	225 x 149 x 49 mm
Weight	540 g
Protection class	I
Protection degree	IP 20
Conformity	www.somfy.com/ce

WIRING

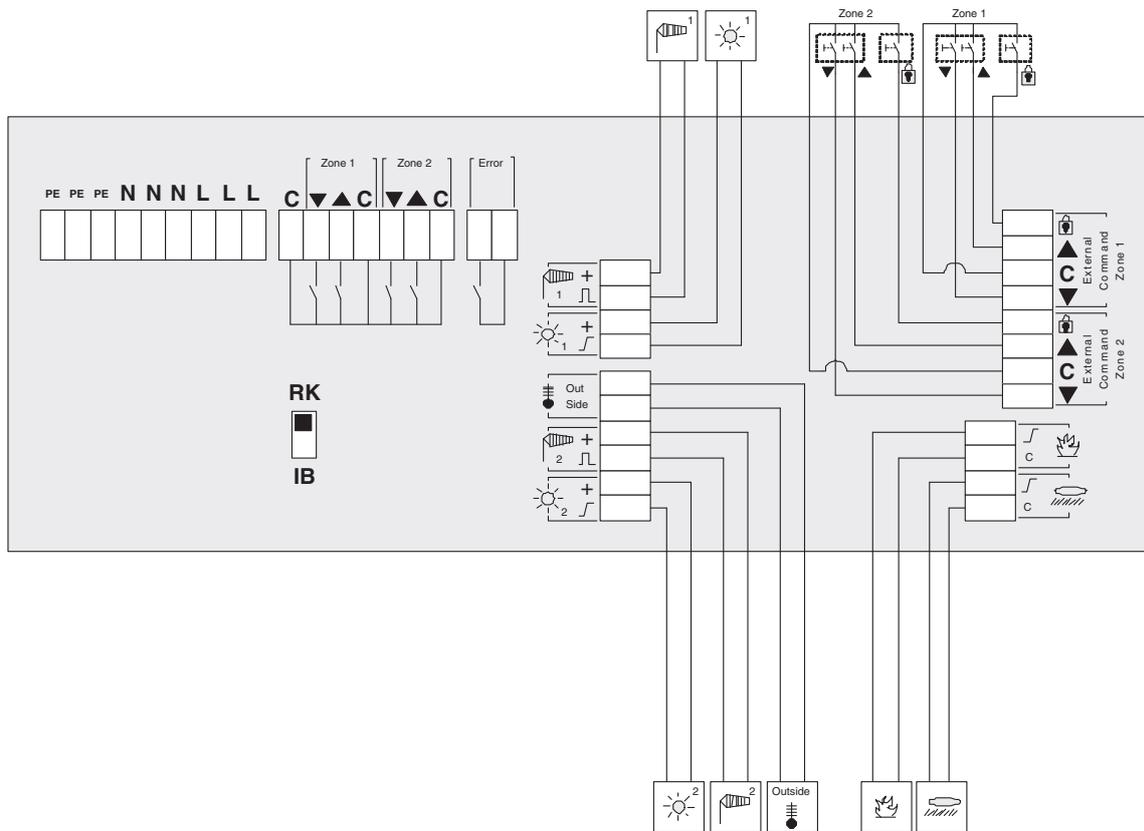

20191010

