

animeo IB

Solo 2 zones

Ref. 1860144



OVERVIEW

animeo Solo is a central control unit for motorised sun protection products and windows that can be used to control applications on one or two building façades. Designed for small to medium sized buildings, the settings can be made directly by the installer without additional software via the menu-driven LCD display.

INSTALLATION FEATURES

- > Easy installation due to uniform spring terminals.
- > Controls all standard Somfy IB, CD and IB+ motor controllers.
- > One assigned switch input for each zone.
- > Sensors can be connected directly to the device (no need for additional sensor boxes).

WHAT'S IN THE BOX

- > animeo Solo 2 zones
- > Installation guide

FUNCTIONAL FEATURES

- > Pre-installed basic configuration.
- > Control of the zones directly on the device.
- > Individual settings per zone.
- > Sun, wind, rain, frost and time switching functions, heat retention and heating through the sun
- > Direct operation on the device or via external switch/key switch.


OPTIONAL ACCESSORIES

- > Soliris Sun Sensor (ref. 9154217)
- > Inside Temperature Sensor (ref. 9008044)
- > Outside Temperature Sensor (ref. 9001611)

CHARACTERISTICS

animeo Solo 1 zone/2 zones	Ref. 1860144
Supply voltage	230 V AC / 50 Hz
Stand-by current (IEC 62301)	< 0.02 A@230 V AC
Stand-by power (IEC 62301)	< 1.5 W@230 V AC
Terminals	Pluggable spring connectors
Supply voltage of sensors IN	SELV, 16 V DC =
Supply voltage of zone switch IN	SELV, 16 V DC =
Supply voltage of error OUT	Dry contact, NO, 24 V/1 A max.
Zone relay as motor/RK/IB	230 V, 3.0 A, $\cos \phi = 0.95$
Operating temperature	0 to 45 °C
Relative humidity	Max. 85 %
Housing material	Glass, metal and PC-ABS
Housing dimensions (h x w x d)	225 x 149 x 49 mm
Weight	540 g
Protection class	I
Protection degree	IP 20
Conformity	www.somfy.com/ce

WIRING

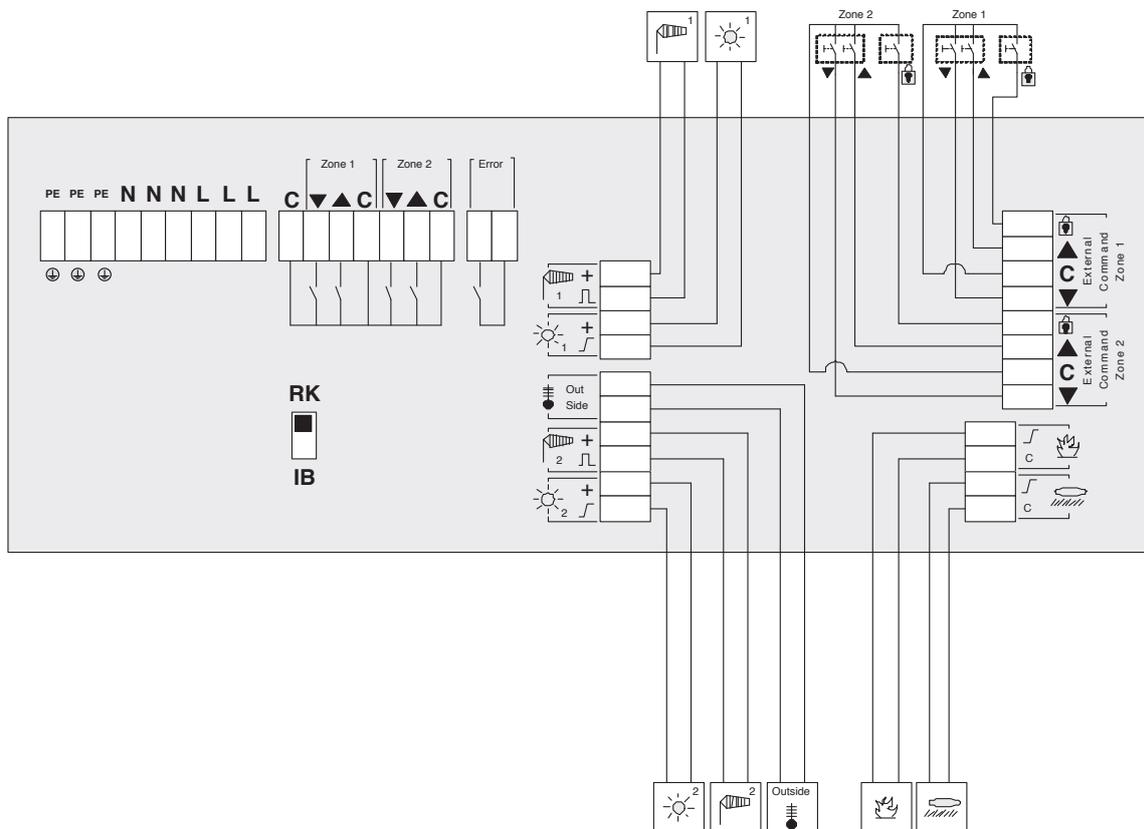

20240129

